




CE30SA Residential Spark Arresting Silencers

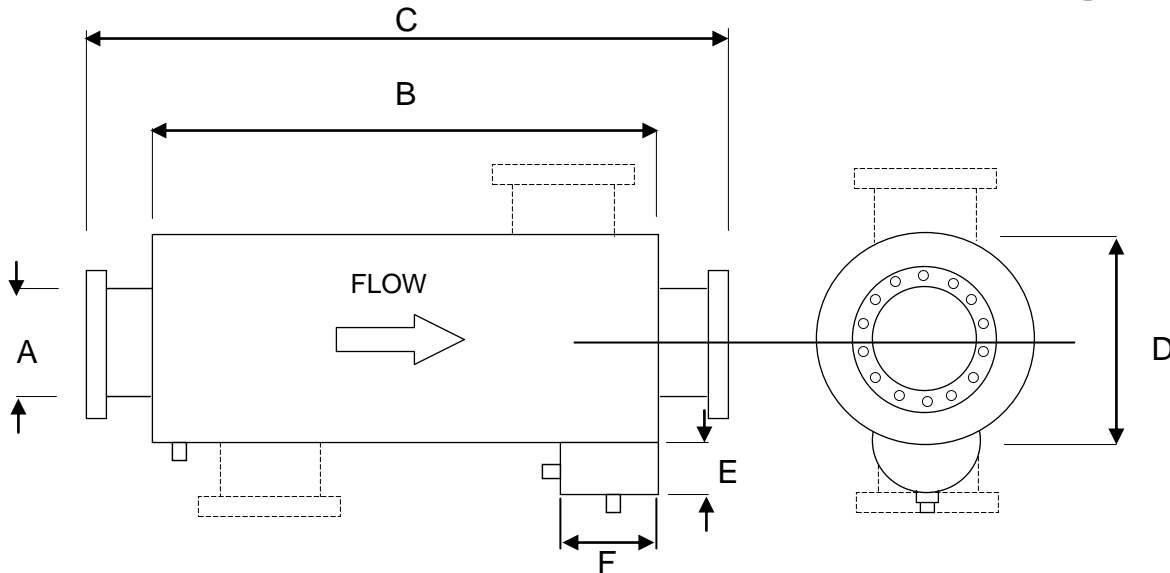

CE30SA


(END INLET-END OUTLET)

CE30SAS

(SIDE INLET-END OUTLET)

| ØA | B | C | ØD | RAD E | F |
|-----|------|------|------|-------|-----|
| 75 | 1070 | 1240 | 350 | 65 | 175 |
| 100 | 1140 | 1315 | 400 | 75 | 225 |
| 125 | 1400 | 1575 | 450 | 75 | 250 |
| 150 | 1525 | 1705 | 550 | 90 | 275 |
| 200 | 1830 | 2040 | 660 | 100 | 300 |
| 250 | 2340 | 2555 | 760 | 150 | 375 |
| 300 | 2740 | 2955 | 915 | 150 | 450 |
| 350 | 3300 | 3560 | 1020 | 155 | 510 |
| 400 | 3860 | 4035 | 1170 | 160 | 575 |

* Larger sizes available on request

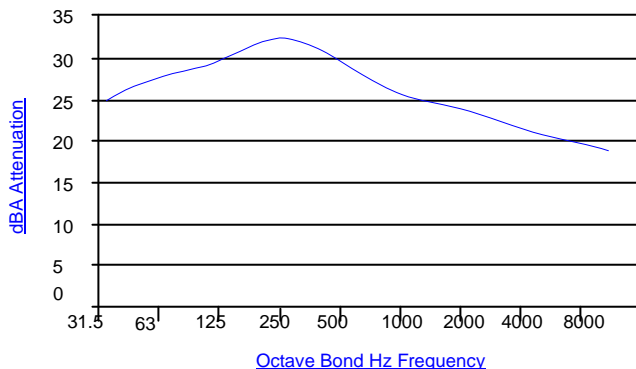

APPLICATION

Residential Spark Arresting series is a high performance reactive silencer recommended for those conditions where the ambient noise level in the environment is very low, particularly where stringent noise criterion is demanded and offers excellent broadband attenuation. For use with two and four cycle engines.

PERFORMANCE

An attenuation of up to 30dbA is attained from the outlet of CE30SA / CE30SAS range of silencers under open-field conditions.

FEATURES

- Mild steel body with JIS 5K flanges
- Coated with heat-resistant aluminum paint (Up to 600°C)
- Can be mounted either vertically or horizontally without affecting performance
- Modifications and other sizes available upon request

CORD EXHAUST ENGINEERING PTE LTD

69 TECH PARK CRESCENT, SINGAPORE 638073.

TEL NO : 67442689 FAX NO : 67472217 E-MAIL : enquires@cordexhaust.com.sg WEBSITE : www.cordexhaust.com.sg